

Omega Pack

Mini condensate removal pump

The performance of our Si-20 with a sleek case for install under the air conditioning unit.



Suitable for

- Up to 5.5 tons
- Wall mounted units

Performance

- 5 gph max. flow
- 33' max. discharge



Modern design



Reversible mounting



Rubber dampers



Drain safe device


Omega Pack tech specs

Max. Flow rate	5.0 gph
Max. Discharge head	33ft; flow rate = 1 gph
Max. Pressure	46ft; flow rate = 0 gph
Sound level at 3.3ft	22 dBA according to EN ISO 3744 (measured at LNE lab, pump operating with water, out of application)
Power supply	120 v ~ 60 Hz - 14 W (OP20UL01UN12) 230 v ~ 50/60 Hz - 14 W (OP20UL01UN23)
Insulation class	Double insulation <input type="checkbox"/>
Detection levels	On: $\frac{3}{8}$ " / Off: $\frac{7}{16}$ " / Safety: $\frac{3}{4}$ "

Safety switch	NC 8A resistive - 250 V
Thermal protection	240°F auto-reset
Operating conditions	120V - 50%: 3s ON – 3s OFF 230V - 60%: 3s ON – 2s OFF
Color	RAL 9010 – Pure white
Cover dimensions	L 12 $\frac{7}{8}$ " x W 2 $\frac{1}{4}$ " x H 2 $\frac{1}{2}$ "
Safety standards	UL / CSA certified by Intertek
RoHS & WEEE directives	Compliant
Packaging	1.61 lbs - L 14 $\frac{1}{8}$ " x W 3 $\frac{3}{8}$ " x H 4"
Masterpack	6 pieces



Actual flow rates (GPH)

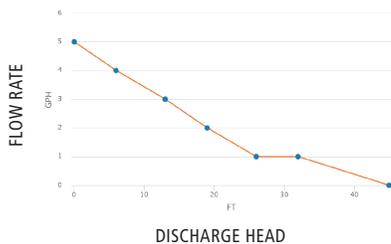

Sound level



Recommended accessories



- Clear PVC hose, $\frac{1}{4}$ " i.d.**
- ACC00909: 16ft roll
 - ACC00910: 164ft roll



- Self-sealing fitting to connect discharge tube to drain pipe.**
- ACC00919, 5 pcs, for $\frac{1}{4}$ " i.d.

What's in the box

- Si-20 piston pump with clear pvc tube fitted with a pre-mounted drain safe device
- 5' power cable: 2 power wires, 2 safety contact wires
- Anti-vibration rubber damper
- Case, 2 pieces: backplate & cover
- 3 screw & plugs for affixing backplate
- Detection unit – Si2958, 2' cable
- Detection unit installation kit:
 - Rubber elbow
 - Vent tube
 - Split connector
 - 3 double wire clamps
 - 3 tie wraps