

Si-10

Mini condensate removal pump

Integrated detection unit for install in tight spaces.

SUITABLE FOR

- Up to 5.5 tons
- Wall mounted
- Ducted units
- Suspended ceiling units
- Floor mounted units

PERFORMANCE

- 5 gph max. flow
- 33' max. discharge



Key features

- Mounting bracket
- Compact monobloc design
- Integrated detection unit

Si-10 tech specs

MAX. FLOW RATE: 5.0 gph

MAX. DISCHARGE HEAD: 33ft; flow rate = 1 gph

MAX. PRESSURE: 46ft; flow rate = 0 gph

SOUND LEVEL AT 3.3FT: 23 dBA according to EN ISO 3744 (Measured at LNE lab, pump operating with water, out of application)

POWER SUPPLY: 120 V ~ 60 Hz - 14 W (SI10UL01UN12)
230 V ~ 50/60 Hz - 14 W (SI10UL01UN23)

INSULATION CLASS: Double Insulation

DETECTION LEVELS: On: 2³/₃₂" • Off: 1⁵/₃₂" • Safety: 1³/₁₆"

OPERATING AND STORAGE TEMPERATURE: +36 to +122 °F

SAFETY SWITCH: NC 3 A resistive load – 250 V

THERMAL PROTECTION: 240°F auto-reset

OPERATING CONDITIONS: 70%: 3s ON – 1s OFF

PUMP DIMENSIONS: L 2⁵/₈" x W 1³/₄" x H 3"

SAFETY STANDARDS: UL / CSA certified by Intertek


RoHS & WEEE DIRECTIVES: Compliant

PACKAGING: 0.86 lbs - L 4²/₅" x W 3³/₅" x H 3³/₅"


MASTERPACK: 25 pieces



Actual flow rates (GPH)

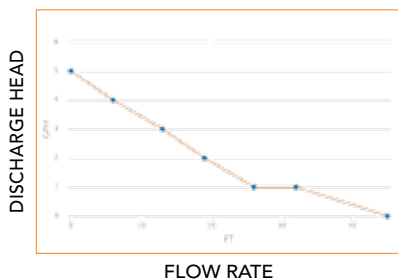

Sound level

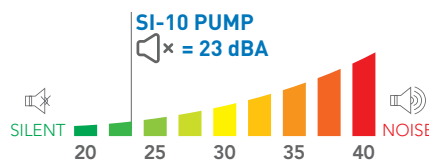

Recommended accessories

- Clear PVC hose, 1/4" i.d.**
 - ACC 00909: 16ft roll • ACC 00910: 164ft roll
 - ACC 00914: Reinforced, 164ft roll
- Self-sealing fitting to connect discharge tube to drain pipe.**
 - 6 pcs, for 1/4" i.d.
- Anti-siphon fitting**
 - ACC 00950: 5 pcs, for 1/4" i.d.
- 90° rubber elbow & "S" type hose, for connecting to the detection unit inlet.**
 - ACC 00932 • ACC 00933

What's in the box



- Si-10 piston pump with integrated float detection unit
- 5' power cable: 2 power wires, 2 safety contact wires
- Anti-vibration mounting bracket
- Rubber elbow
- Vent tube



SCAN THIS QR CODE FOR ADDITIONAL Si-10 TECHNICAL INFORMATION